

On the Performance of Lossless Joint Source-Channel Coding Based on Linear Codes

Shengtian Yang and Peiliang Qiu

Dept. of ISEE

Zhejiang University

Separation, or not separation, for source and channel coding

- Shannon's separation theorem:
 - Separate source and channel coding incurs no loss of optimality provided that the coding length goes to infinity.
- Benefits of joint source-channel coding
 - Zhong, et al, "On the joint source-channel coding error exponent for discrete memoryless systems", 2006
 - Gastpar, et al, "To code, or not to code: Lossy Source-Channel Communication Revisited", 2003
- Cover, et al, "Multiple access channels with arbitrarily correlated sources", 1980

Overview



- A lossless joint source-channel coding scheme based on linear codes and random interleavers.
- What are good linear codes for our scheme?
Code spectrum.
- Future work

A general scheme for lossless joint source-channel coding


- For special sources and channels, there have been lots of work on the design of lossless joint source-channel coding based on linear codes (for multiple-access channels). For example:
 - Effros, et al, “Linear network codes: A unified framework for source, channel, and network coding”, 2004
 - Zhong and Garcia-Frias, “LDGM codes for channel coding and joint source-channel coding of correlated sources,” 2005
- For arbitrary sources and channels, how to construct a limit-approaching lossless joint source-channel coding scheme based on linear codes?



Channel coding based on linear codes

- Gallager, “Information Theory and Reliable Communication”, 1963
 - Coset codes
 - Quantization mapping
- Shulman and Feder, “Random coding techniques for nonrandom codes”, 1999
- Bennatan and Burshtein, “On the application of LDPC codes to Arbitrary Discrete-Memoryless Channels”, 2004

Channel Encoding Scheme

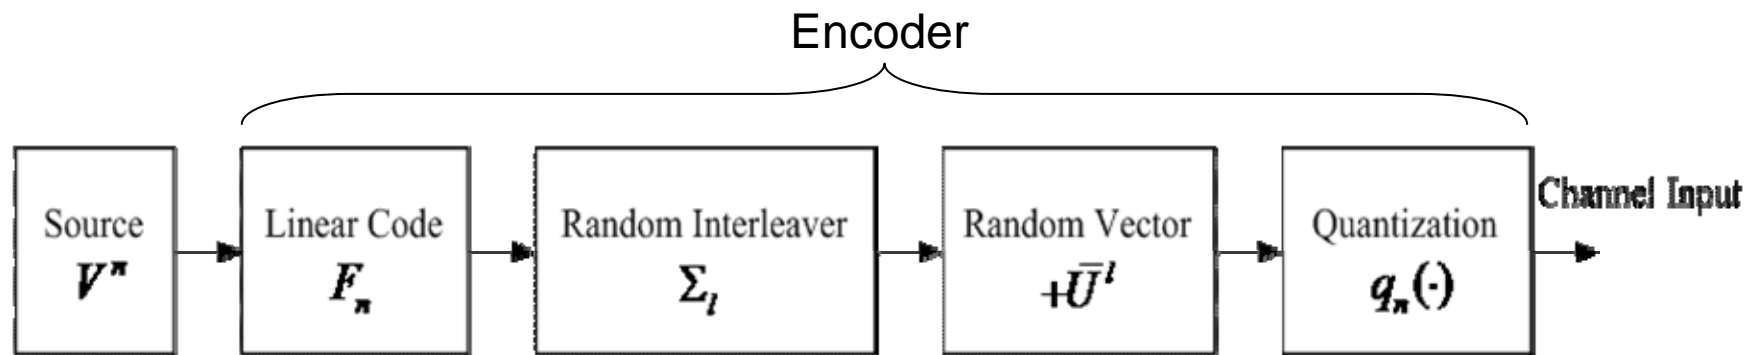


- We can build a limit-approaching scheme just by selecting a good linear code and designing a good quantization according to an input distribution which maximizes the mutual information of the channel.

Fixed-Length Source coding based on linear codes


- Csiszar, “Linear codes for sources and source networks: Error exponents, universal coding”, 1982
- Muramatsu, et al, “Low-density parity-check matrices for coding of correlated sources”, 2005
- Yang and Qiu, “On the performance of linear Slepian-Wolf codes for correlated stationary memoryless sources,” 2005

Fixed-Length Source encoding Scheme Based on Linear Codes

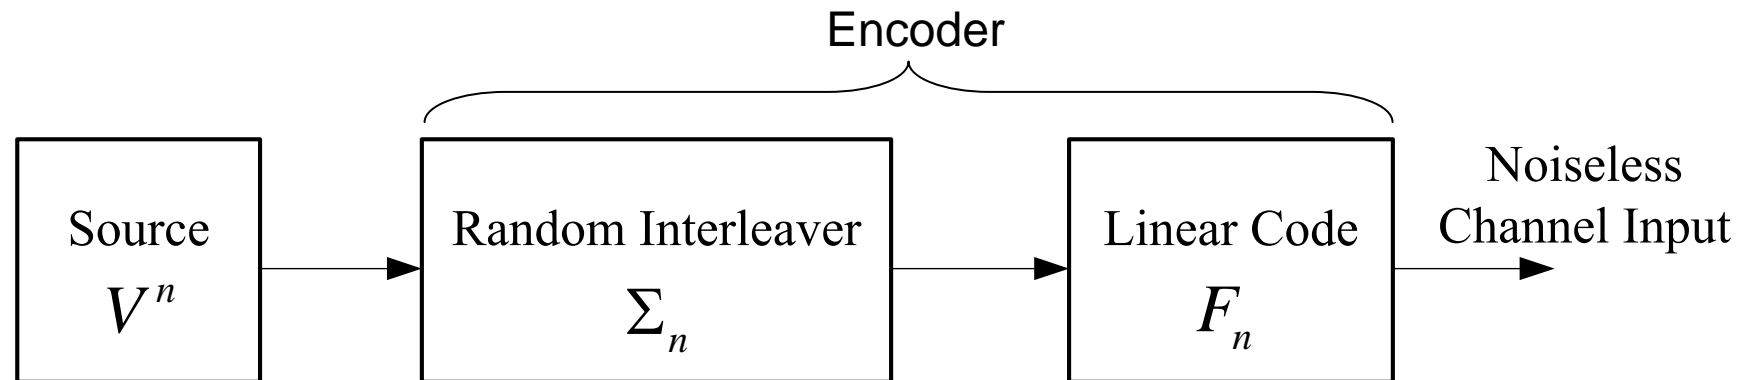

- We can build a limit-approaching scheme by selecting a good linear code.

Our Proposed Encoding Scheme for Joint Source-Channel Coding

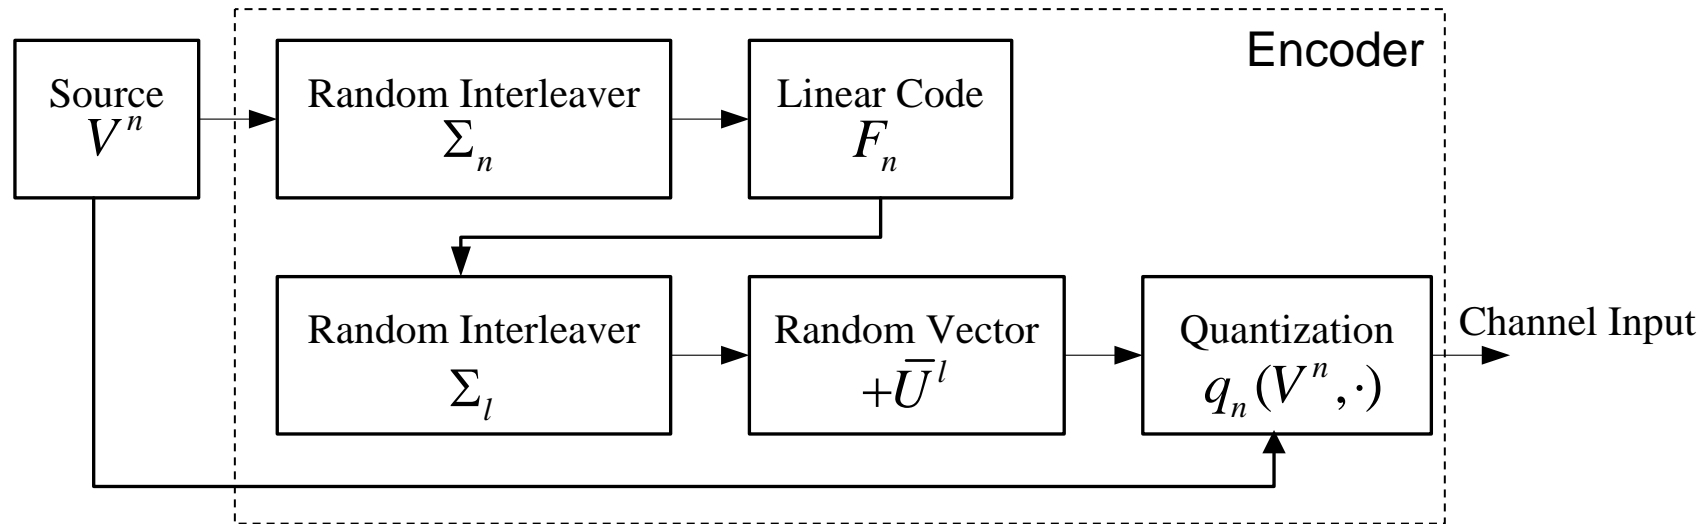

- For general sources and general channels, we can build a limit-approaching scheme just by selecting a good linear code and designing a good quantization according to a conditional input distribution which enables the source to be transmissible over the channel.



For Multiple-Access Channels

- Our scheme can also be extended to the case of multiple-access channels.
- Yang and Qiu, “On the performance of lossless joint source-channel coding based on linear codes for multiple-access channels,” in preparation.

The Key Idea of Our Scheme

- Shannon's random sphere packing
 - The key idea: pairwise independence of codewords is sufficient for achieving the limit-approaching performance.
- The art of lossless joint source-channel coding is:
 - How to generate a sequence of mutually independent random variables subject to a conditional probability distribution?
 - For our scheme, what are good linear codes for generating such sequences?

What Are Good Linear Codes for Lossless Joint Source-Channel Coding?

- Code spectrum

- A distribution of distributions, well established by the method of types
- A generalized and normalized version of the weight distribution and input-output weight distribution for binary codes

Definition of Spectrum

The *type* of a sequence \mathbf{x} in \mathcal{X}^n is the empirical distribution $P_{\mathbf{x}}$ on \mathcal{X} defined by

$$P_{\mathbf{x}}(a) \equiv \frac{N(a|\mathbf{x})}{|\mathbf{x}|}, \quad \forall a \in \mathcal{X}.$$

The *spectrum* of a set $A \subseteq \mathcal{X}^n$ is the empirical distribution $S_{\mathcal{X}}(A)$ on $\mathcal{P}(\mathcal{X})$ defined by

$$S_{\mathcal{X}}(A)(P) \equiv \frac{|\{\mathbf{x} \in A | P_{\mathbf{x}} = P\}|}{|A|}, \quad \forall P \in \mathcal{P}(\mathcal{X}).$$

Similarly, the *joint spectrum* of a set $B \subseteq \mathcal{X}^n \times \mathcal{Y}^m$ is the empirical distribution $S_{\mathcal{X}\mathcal{Y}}(B)$ on $\mathcal{P}(\mathcal{X}) \times \mathcal{P}(\mathcal{Y})$ defined by

$$S_{\mathcal{X}\mathcal{Y}}(B)(P, Q) \equiv \frac{|\{(\mathbf{x}, \mathbf{y}) \in B | P_{\mathbf{x}} = P, P_{\mathbf{y}} = Q\}|}{|B|},$$

The spectrum of linear codes

For a given linear code $f : \mathcal{X}^n \rightarrow \mathcal{Y}^m$, we can define the *joint spectrum* of f :

$$S_{\mathcal{X}\mathcal{Y}}(f) \equiv S_{\mathcal{X}\mathcal{Y}}(\text{rl}(f)),$$

where $\text{rl}(f) \equiv \{(x, f(x)) | x \in \mathcal{X}^n\}$.

The *image spectrum* of f :


$$S_{\mathcal{Y}}(f)(Q) \equiv \sum_{P \in \mathcal{P}(\mathcal{X})} S_{\mathcal{X}\mathcal{Y}}(f)(P, Q)$$

$$S_{\mathcal{Y}}(f)(Q) = S_{\mathcal{Y}}(f(\mathcal{X}^n))$$

The *kernel spectrum* of f :

$$S_{\mathcal{X}}(\text{Ker } f),$$

where $\text{Ker } f \equiv \{x \in \mathcal{X}^n | f(x) = 0^m\}$

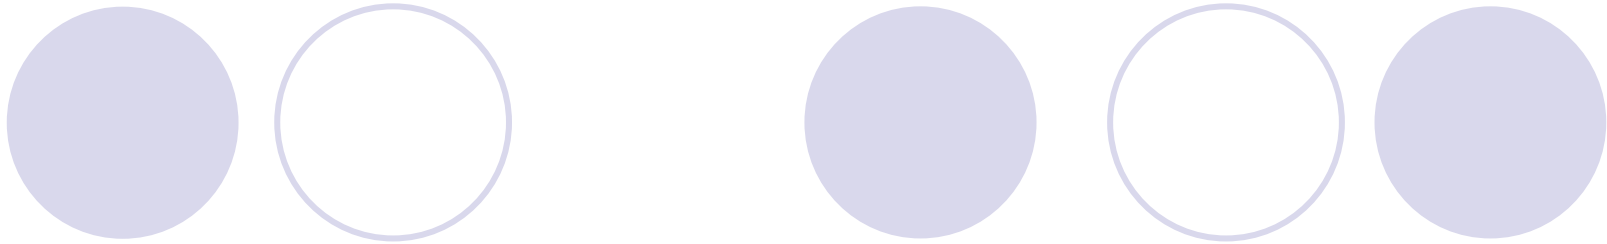

Proposition 3 For a given random function $F : \mathcal{X}^n \rightarrow \mathcal{Y}^m$, we have


$$\Pr\{\tilde{F}(x) = y\} = |\mathcal{Y}|^{-m} \alpha(F)(P_x, P_y)$$

for any $x \in \mathcal{X}^n$, $y \in \mathcal{Y}^m$, where

$$\tilde{F} \equiv \Sigma_m \circ F \circ \Sigma_n$$

and

$$\alpha(F)(P, Q) \equiv \frac{E[S_{\mathcal{X}\mathcal{Y}}(F)(P, Q)]}{S_{\mathcal{X}\mathcal{Y}}(\mathcal{X}^n \times \mathcal{Y}^m)(P, Q)}.$$

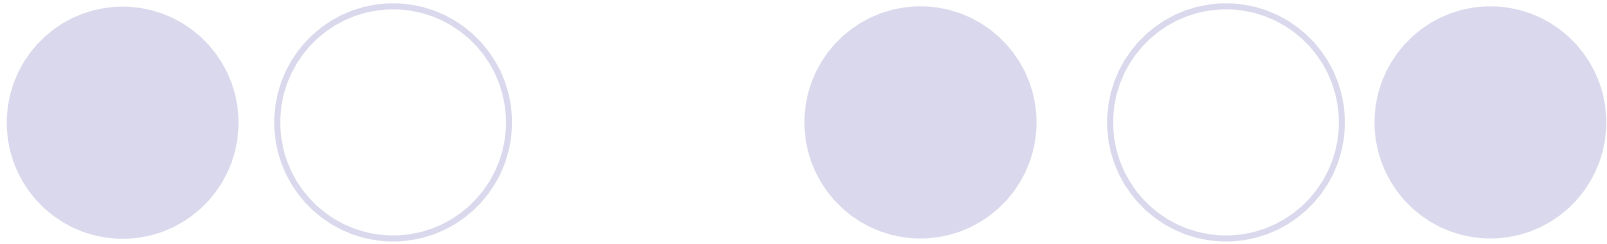

Proposition 5 For a given random linear code $F : \mathcal{X}^n \rightarrow \mathcal{Y}^m$, we have

$$\Pr\{\hat{F}(x_1) = y_1\} = |\mathcal{Y}|^{-m},$$

$$\begin{aligned} &\Pr\{\hat{F}(x_2) = y_2 | \hat{F}(x_1) = y_1\} \\ &= |\mathcal{Y}|^{-m} \alpha(F)(P_{x_2 - x_1}, P_{y_2 - y_1}), \end{aligned}$$

for any unequal $x_1, x_2 \in \mathcal{X}^n$ and any $y_1, y_2 \in \mathcal{Y}^m$, where

$$\hat{F}(x) \equiv \tilde{F}(x) + \bar{Y}^m$$

where \bar{Y}^m denotes a uniform random vector on \mathcal{Y}^m .




Clearly, when the the quantity $\alpha(F) \rightarrow 1$, or

$$\frac{E[S_{\mathcal{X}\mathcal{Y}}(F)(P, Q)]}{S_{\mathcal{X}\mathcal{Y}}(\mathcal{X}^n \times \mathcal{Y}^m)(P, Q)} \rightarrow 1,$$

we can then generate a pairwise independent random sequence (each variable with uniform distribution) by the affine map

$$\begin{aligned}\hat{F}(\mathbf{x}) &= \tilde{F}(\mathbf{x}) + \bar{Y}^m \\ &= \Sigma_m(F(\Sigma_n(\mathbf{x}))) + \bar{Y}^m\end{aligned}$$

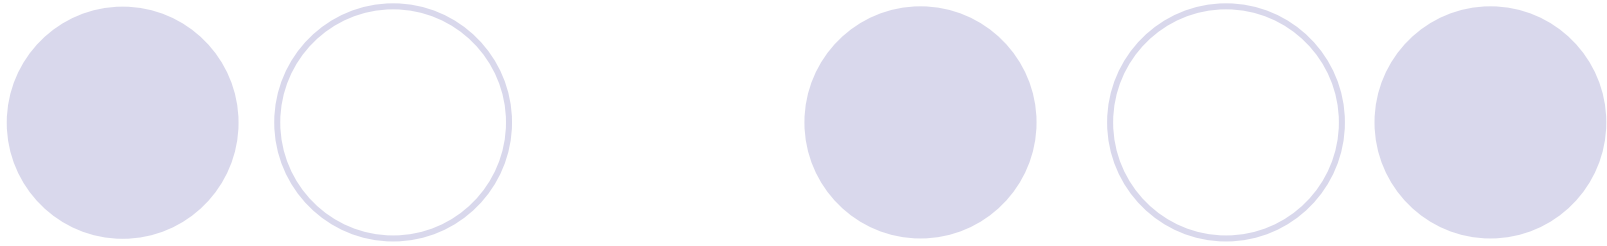

In Lemma 1 of our paper, we further proved that the following function

$$\Phi(\boldsymbol{v}) = q(\boldsymbol{v}, \hat{F}(\boldsymbol{v})) = \underline{q(\boldsymbol{v}, \Sigma_l(F(\Sigma_n(\boldsymbol{x}))) + \bar{U}^l)}$$

can produce pairwise independent sequences for any specified conditional probability distributions as long as the joint spectrum of F is close to the joint spectrum of $\mathcal{X}^n \times \mathcal{Y}^m$.



Code spectrum: A unified view

- By the approach of code spectrum, we can now answer the question “what are good linear codes” for source coding, channel coding and joint source-channel coding in a unified framework.

The answer for goodness of linear codes

Coding System	Spectrum Requirement	Good Candidates
Fixed-length source coding	$S_{\mathcal{X}}(\text{Ker } f) \rightarrow S_{\mathcal{X}}(\mathcal{X}^n)$	Parity-check matrices of Turbo-like codes and LDPC codes
Channel coding	$S_{\mathcal{Y}}(f(\mathcal{X}^n)) \rightarrow S_{\mathcal{Y}}(\mathcal{Y}^m)$	Generator matrices of Turbo-like codes and LDPC codes
Joint source-channel coding	$S_{\mathcal{X}\mathcal{Y}}(f) \rightarrow S_{\mathcal{X}\mathcal{Y}}(\mathcal{X}^n \times \mathcal{Y}^m)$	Not Investigated, perhaps Turbo codes and RA codes

Future work




- A problem of optimization: How to find a good conditional probability distribution for any given sources and channels?
- A problem of coding: How to construct a linear code with good joint spectrum?
- A problem of decoding: How to design an iterative decoding algorithm close to the optimal performance but with low complexities?

References

1. A. Bennatan and D. Burshtein, "On the application of LDPC codes to arbitrary discrete-memoryless channels," IEEE Trans. Inform. Theory, vol. 50, no. 3, pp. 417-437, Mar. 2004.
2. I. Csiszar, "Linear codes for sources and source networks: Error exponents, universal coding," IEEE Trans. Inform. Theory, vol. 28, no. 4, pp. 585-592, July 1982.
3. T. M. Cover, A. E. Gamal, and M. Salehi, "Multiple access channels with arbitrarily correlated sources," IEEE Trans. Inform. Theory, vol. 26, no. 6, pp. 648-657, Nov. 1980.
4. M. Effros, M. Medard, T. Ho, et al, "Linear network codes: A unified framework for source, channel and network coding," DIMAC 2004, pp. 197-216.
5. R. G. Gallager, Information Theory and Reliable Communication. New York: Wiley, 1968.



6. M. Gastpar, B. Rimoldi, and M. Vetterli, "To code, or not to code: Lossy source-channel communication revisited," *IEEE Trans. Inform. Theory*, vol. 49, no. 5, pp. 1147-1158, May 2003.
7. J. Muramatsu, T. Uyematsu, and T. Wadayama, "Low-density parity-check matrices for coding of correlated sources," *IEEE Trans. Inform. Theory*, vol. 51, no. 10, pp. 3645–3654, Oct. 2005.
8. N. Shulman and M. Feder, "Random coding techniques for nonrandom codes," *IEEE Trans. Inform. Theory*, vol. 45, pp. 2101–2104, Sept. 1999.
9. S. Yang and P. Qiu, "On the performance of linear Slepian-Wolf codes for correlated stationary memoryless sources," in *Proc. DCC 2005*, Snowbird, UT, Mar. 2005, pp. 53–62.
10. Y. Zhong, F. Alajaji, and L. L. Campbell, "On the joint source-channel coding error exponent for discrete memoryless systems," *IEEE Trans. Inform. Theory*, vol. 52, no. 4, pp. 1450–1468, Apr. 2006.

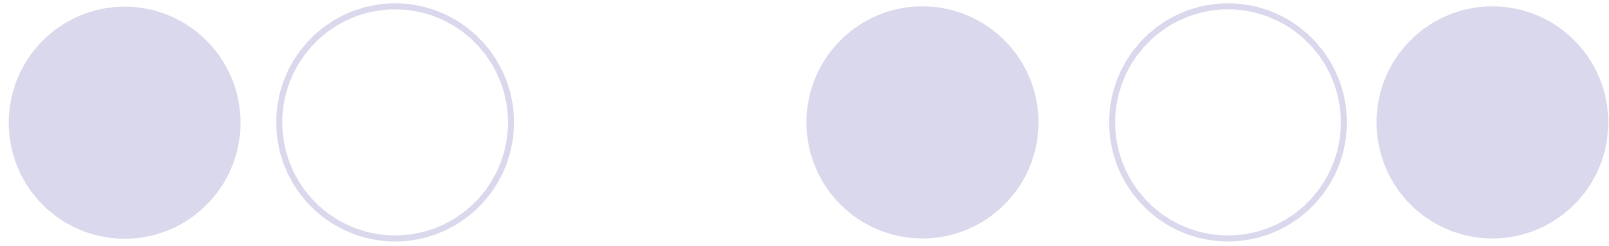

11. W. Zhong and J. Garcia-Frias, "LDGM codes for channel coding and joint source-channel coding of correlated sources," EURASIP Journal on Applied Signal Processing, vol. 2005, no. 6, pp. 942-953, May 2005.



Thank you!

My Homepage:
<http://datacompression.zj.com>