



# An Enhanced Covering Lemma for Multiterminal Source Coding

Shengtian Yang and Peiliang Qiu

Dept. of ISEE


Zhejiang University



# Overview

- The history of multiterminal source coding
- The covering lemma for a Markov chain
- Some ideas in the proof of multiterminal source coding

# The Problem of Multiterminal Source Coding

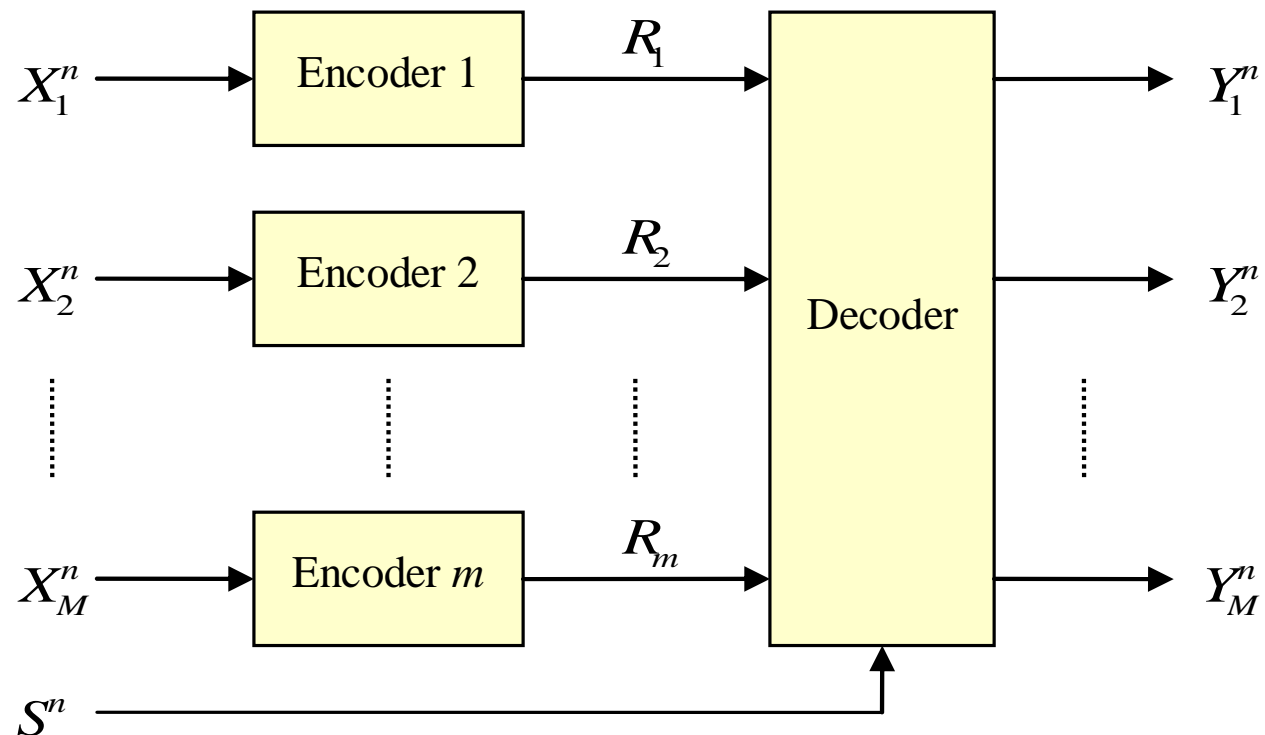

# The Lossless Case: Slepian-Wolf Coding

- Slepian and Wolf, 1973, for stationary and memoryless sources

$$R_1 \geq H(X_1|X_2), \quad R_2 \geq H(X_2|X_1)$$

$$R_1 + R_2 \geq H(X_1, X_2)$$

- Cover, 1975, for stationary and ergodic sources
- Miyake and Kanaya, 1995, for general sources

# The Lossy Case for Discrete Sources: The Berger-Tung Inner/Outer Bounds

**Inner Bound:**

$$R_1 \geq I(X_1; Z_1|Z_2)$$

$$R_2 \geq I(X_2; Z_2|Z_1)$$

$$R_1 + R_2 \geq I(X_1, X_2; Z_1, Z_2)$$

where

$$\underline{p(x_1, x_2, z_1, z_2) = p(x_1, x_2)p(z_1|x_1)p(z_2|x_2)}$$

$$E[d_1(x_1, h_1(z_1, z_2))] \leq D_1$$

$$E[d_2(x_2, h_2(z_1, z_2))] \leq D_2$$



**Outer Bound:**

$$R_1 \geq I(X_1, X_2; Z_1|Z_2)$$

$$R_2 \geq I(X_1, X_2; Z_2|Z_1)$$

$$R_1 + R_2 \geq I(X_1, X_2; Z_1, Z_2)$$

where

$$\underline{p(x_1, x_2, z_1) = p(x_1, x_2)p(z_1|x_1)}$$

$$\underline{p(x_1, x_2, z_2) = p(x_1, x_2)p(z_2|x_2)}$$

$$E[d_1(x_1, h_1(z_1, z_2))] \leq D_1$$

$$E[d_2(x_2, h_2(z_1, z_2))] \leq D_2$$

# Some special cases

- Wyner-Ziv coding: Lossy source coding with uncoded side information at the decoder
  - Wyner and Ziv, 1976, for stationary memoryless sources
  - Iwata and Muramatsu, 2002, for general sources with maximum distortion criteria
- Multiterminal source coding with one distortion criterion, Berger and Yeung, 1988
- Multiterminal source coding with uncoded side information at the decoder, Gastpar, 2004

# The Covering Lemma for a Markov Chain

- Lemma 4.3, Wyner, “On source coding with side information at the decoder”, 1975
- Wyner and Ziv, “The rate-distortion function for source coding with side information at the decoder”, 1976
- Iwata and Muramatsu, “An information-spectrum approach to rate-distortion function with side information”, 2002



which we used is the following. Let the random vectors  $U^n, V^n, W^n$  be independent copies of  $U, V, W$  which take values in the finite sets  $\mathcal{U}, \mathcal{V}, \mathcal{W}$ , respectively. Assume further that  $U$  and  $W$  are conditionally independent given  $V$ . Let  $\psi_n: \mathcal{U}^n \times \mathcal{W}^n \rightarrow [0,1]$  be an arbitrary function and let  $\{\psi_n\}_{n=1}^\infty$  be sequence of such functions. Assume that

$$\lim_{n \rightarrow \infty} E[\psi_n(U^n, W^n)] = 0. \quad (\text{A12})$$

A PB-code  $(n_0, M_0)$  is a mapping

$$F: \mathcal{V}^n \rightarrow \{w_j\}_{j=1}^{M_0} \subseteq \mathcal{W}^n.$$

Lemma 4.3 in [7] states that, for arbitrary  $\varepsilon > 0$  and for  $n_0 = n_0(\varepsilon)$  sufficiently large, there exists a PB-code  $(n_0, M_0)$  such that

$$M_0 \leq \exp_2 \{n_0[I(V;W) + \varepsilon]\} \quad (\text{A13a})$$

$$E[\psi_{n_0}(U^n, F(V^n))] \leq \varepsilon. \quad (\text{A13b})$$

To apply this lemma to our problem, let  $\mathcal{U} = \mathcal{X} \times \mathcal{Y}$ ,  $\mathcal{V} = \mathcal{X}$ , and  $\mathcal{W} = \mathcal{Z}$ , and set  $U = (X, Y)$ ,  $V = X$ , and  $W = Z$ . Since  $X, Y, Z$  satisfy (12b) and  $U$  and  $W$  are conditionally independent

given  $V$ , as required. Now the functions  $\{\psi_n\}$ , defined in (76) satisfy (A12) (by (77)), so that Lemma 4.3 in [7] can be applied to deduce the existence of a function  $F$  which satisfies (A13). Since (A13a) and (A13b) are identical to (78a) and (78b), respectively, our task is completed.

## REFERENCES

- [1] T. Berger, *Rate-Distortion Theory: A Mathematical Basis for Data Compression*. Englewood Cliffs, N.J.: Prentice-Hall, 1971.
- [2] H. G. Eggleston, *Convexity*. Cambridge, England: Cambridge Univ. Press, 1958, p. 35.
- [3] R. G. Gallager, *Information Theory and Reliable Communication*. New York: Wiley, 1968.
- [4] C. E. Shannon, "Coding theorems for a discrete source with a fidelity criterion," *IRE Nat. Conv. Rec.*, pt. 4, pp. 142-163, Mar. 1959.
- [5] D. Slepian and J. K. Wolf, "Noiseless coding of correlated information sources," *IEEE Trans. Inform. Theory*, vol. IT-19, pp. 471-480, July 1973.
- [6] H. S. Witsenhausen and A. D. Wyner, "A conditional entropy bound for a pair of discrete random variables," *IEEE Trans. Inform. Theory*, vol. IT-21, pp. 493-501, Sept. 1975.
- [7] A. D. Wyner, "On source coding with side-information at the decoder," *IEEE Trans. Inform. Theory*, vol. IT-21, pp. 294-300, May 1975.

# The Covering Lemma in Iwata and Muramatsu's paper

**Lemma 1** (Lemma 1 in [4]) *Let  $U^n$ ,  $V^n$  and  $W^n$  be random variables which take values in finite sets  $\mathcal{U}^n$ ,  $\mathcal{V}^n$  and  $\mathcal{W}^n$ , respectively, and satisfy a Markov condition*


$$P_{U^n V^n W^n} = P_{W^n V^n} P_{U^n | V^n}$$

*for each  $n$ . Now let  $\{\Psi_n\}_{n=1}^\infty$  be a sequence of arbitrary functions such that*

$$\begin{aligned} \Psi_n : \mathcal{U}^n \times \mathcal{W}^n &\rightarrow \{0, 1\}, \\ \lim_{n \rightarrow \infty} \Pr\{\Psi_n(U^n, W^n) = 1\} &= 0. \end{aligned}$$

*Then, for any  $\gamma > 0$ , there exists a sequence  $\{F_n\}_{n=1}^\infty$  of function  $F_n : \mathcal{V}^n \rightarrow \{\mathbf{w}_i\}_{i=1}^{M'_n} \subseteq \mathcal{W}^n$  such that*

$$\begin{aligned} M'_n &= \left\lceil e^{n(\overline{I}(\mathbf{V}; \mathbf{W}) + \gamma)} \right\rceil, \\ \lim_{n \rightarrow \infty} \Pr\{\Psi_n(U^n, F_n(V^n)) = 1\} &= 0. \end{aligned}$$

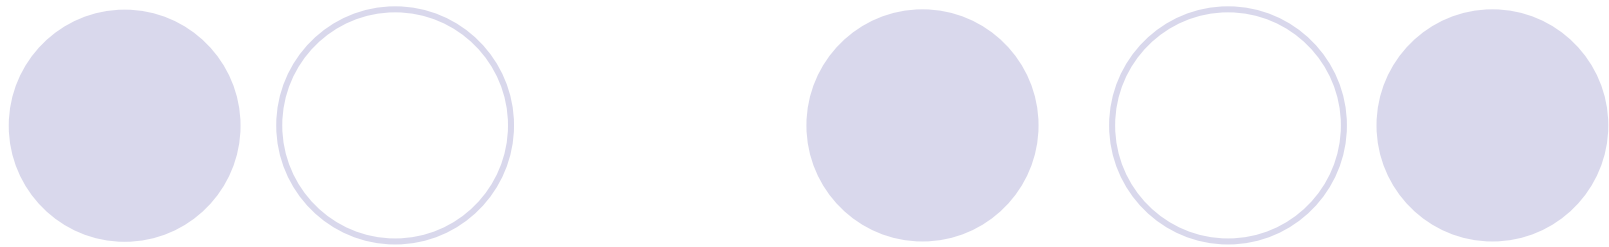

$$\bar{I}(\mathbf{V}; \mathbf{W}) \triangleq \text{p-}\limsup_{n \rightarrow \infty} \frac{1}{n} \ln \frac{P_{V^n W^n}(V^n, W^n)}{P_{V^n}(V^n) P_{W^n}(W^n)}$$

$$\text{p-}\limsup_{n \rightarrow \infty} Z_n \triangleq \inf \left\{ \alpha \left| \lim_{n \rightarrow \infty} \Pr\{Z_n > \alpha\} = 0 \right. \right\}$$

When  $\mathbf{V}$  and  $\mathbf{W}$  are stationary and memoryless, we have

$$\bar{I}(\mathbf{V}; \mathbf{W}) = I(V; W)$$

# To Understand It

Given a markov chain  $U^n \rightarrow V^n \rightarrow W^n$  and a set  $A_n$  such that

$$\lim_{n \rightarrow \infty} \Pr\{(U^n, W^n) \in A_n\} = 1,$$

we may find a function  $F_n : V^n \rightarrow W^n$  whose rate

$$\frac{1}{n} \ln |F_n(\mathcal{V}^n)| \rightarrow \bar{I}(V, W)$$

and the random variable  $F_n(V^n)$  can simulate  $W^n$  so that

$$\lim_{n \rightarrow \infty} \Pr\{(U^n, F_n(V^n)) \in A_n\} = 1.$$

# To Enhance It

Given a markov chain  $U^n \rightarrow V^n \rightarrow W^n$ , a non-negative function  $d_n$  and a set  $A_n$  such that

$$\lim_{n \rightarrow \infty} \Pr\{(U^n, W^n) \in A_n\} = 1,$$

we may find a function  $F_n : V^n \rightarrow W^n$  whose rate

$$\frac{1}{n} \ln |F_n(\mathcal{V}^n)| \rightarrow \bar{I}(V, W)$$

and the random variable  $F_n(V^n)$  can simulate  $W^n$  so that

$$\lim_{n \rightarrow \infty} \Pr\{(U^n, F_n(V^n)) \in A_n\} = 1,$$

$$\limsup_{n \rightarrow \infty} (E[d_n(U^n, F_n(V^n))] - E[d_n(U^n, W^n)]) \leq 0.$$

**Lemma 2** *Let  $U_n$ ,  $V_n$  and  $W_n$  be random variables which take values in finite sets  $\mathcal{U}_n$ ,  $\mathcal{V}_n$  and  $\mathcal{W}_n$ , respectively, and satisfy a Markov condition*

$$P_{U_n V_n W_n} = P_{U_n V_n} P_{W_n | V_n}$$

*for each  $n$ . Now let  $\{A_n\}_{n=1}^{\infty}$  be a sequence of arbitrary sets in  $\mathcal{U}_n \times \mathcal{W}_n$  satisfying*

$$\lim_{n \rightarrow \infty} \Pr\{(U_n, W_n) \in A_n\} = 1, \quad (2)$$

*and let  $\{d_n\}_{n=1}^{\infty}$  be a sequence of arbitrary functions  $d_n : \mathcal{U}_n \times \mathcal{W}_n \rightarrow [0, \infty)$  satisfying*

$$D_0 \triangleq \sup_{n \geq 1} \max\{\text{Im } d_n\} < \infty, \quad (3)$$

*where  $\text{Im } d_n$  denotes the image of  $d_n$ , then for any  $\gamma > 0$ , there exists a sequence  $\{F_n\}_{n=1}^{\infty}$  of random functions  $F_n : \mathcal{V}_n \rightarrow \mathcal{W}_n$  such that*

$$|F_n(\mathcal{V}_n)| \leq \left\lceil e^{n(\bar{I}(\mathbf{V}; \mathbf{W}) + \gamma)} \right\rceil, \quad (4)$$

$$\lim_{n \rightarrow \infty} \Pr\{(U_n, F_n(V_n)) \in A_n\} = 1, \quad (5)$$

$$\limsup_{n \rightarrow \infty} (E[d_n(U_n, F_n(V_n))] - E[d_n(U_n, W_n)]) \leq 0, \quad (6)$$



- The main idea of the proof of this enhanced lemma is a combination of the ideas in the proofs of Iwata's covering lemma and Han's Theorem 5.5.1 in his book "Information-Spectrum Methods in Information Theory".

For a given positive random variable  $X$ , we have

$$E[X] = \int_0^{\sup X} \Pr\{X \geq \beta\} d\beta$$

**Proposition 1 (Lemma 2 in [7])** *Let  $U_n$ ,  $V_n$  and  $W_n$  be random variables which take values in finite sets  $\mathcal{U}_n$ ,  $\mathcal{V}_n$  and  $\mathcal{W}_n$ , respectively, and satisfy a Markov condition*

$$P_{U_n V_n W_n} = P_{U_n V_n} P_{W_n | V_n}$$

*for each  $n$ . Now let  $\{B_n\}_{n=1}^\infty$  be a sequence of arbitrary sets in  $\mathcal{U}_n \times \mathcal{W}_n$  satisfying*

$$\liminf_{n \rightarrow \infty} \Pr\{(U_n, W_n) \in B_n\} = \epsilon, \quad (14)$$

*then for any  $\gamma > 0$ , there exists a sequence  $\{F_n\}_{n=1}^\infty$  of random functions  $F_n : \mathcal{V}_n \rightarrow \mathcal{W}_n$  such that*

$$|F_n(\mathcal{V}_n)| \leq \left\lceil e^{n(\bar{I}(\mathbf{V}; \mathbf{W}) + \gamma)} \right\rceil, \quad (15)$$

$$\liminf_{n \rightarrow \infty} \Pr\{(U_n, F_n(V_n)) \in B_n\} \geq \epsilon. \quad (16)$$





# Multiterminal Source Coding

- By the enhanced lemma, we can then obtain the sufficient and necessary condition for determining the achievability of rate-distortion tuples for general sources with one average distortion criterion and multiple maximum distortion criteria under fixed-length coding.
- See Theorem 1 and Remark 2 in the paper.

# Average distortion criterion and maximum distortion criterion

$$\limsup_{n \rightarrow \infty} E[d_n(X^n, Y^n)] \leq D$$


$$\text{p-lim sup}_{n \rightarrow \infty} d_n(X^n, Y^n) \leq D$$

When  $d_n$  is an additive distortion, that is

$$d_n(x^n, y^n) = \frac{1}{n} \sum_{i=1}^n d(x_i, y_i)$$

and  $(X^n, Y^n)$  is stationary and memoryless, then the above two criteria coincide.

# Some ideas in our proof of multiterminal source coding

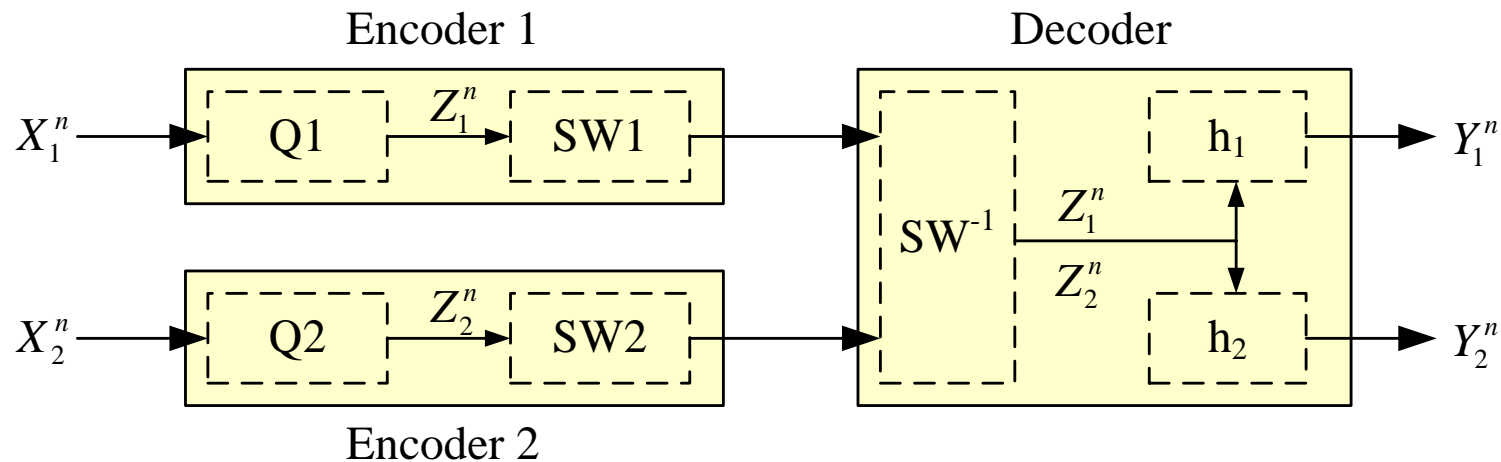

- Two stages of coding:
  - Quantization (Lemma 3)
  - Slepian-Wolf coding (Random binning)

**Understand Lemma 3:** Given a long markov chain  $Z_n^{(1)} \rightarrow X_1^n \rightarrow X_2^n \rightarrow Z_n^{(1)}$ , a function  $d_n$  and a set  $A_n$  such that

$$\lim_{n \rightarrow \infty} \Pr\{(X_1^n, X_2^n, Z_n^{(1)}, Z_n^{(2)}) \in A_n\} = 1,$$

we may find a pair  $(F_n^{(1)}, F_n^{(2)})$  of functions whose rates

$$\frac{1}{n} \ln |F_n^{(i)}| \rightarrow \bar{I}(\mathbf{X}_i, \mathbf{Z}^{(i)}), \quad i = 1, 2$$


and the pair  $(F_n^{(1)}(X_1^n), F_n^{(2)}(X_2^n))$  of random variables can simulate  $(Z_n^{(1)}, Z_n^{(2)})$  so that

$$\lim_{n \rightarrow \infty} \Pr\{(X_1^n, X_2^n, F_n^{(1)}(X_1^n), F_n^{(2)}(X_2^n)) \in A_n\} = 1,$$

$$\limsup_{n \rightarrow \infty} (E[d_n(X_1^n, X_2^n, F_n^{(1)}(X_1^n), F_n^{(2)}(X_2^n))] - E[d_n(X_1^n, X_2^n, Z_n^{(1)}, Z_n^{(2)})]) \leq 0$$

$$\underline{I}(\mathbf{F}^{(1)}(\mathbf{X}_1); \mathbf{F}^{(2)}(\mathbf{X}_2)) \rightarrow \underline{I}(\mathbf{Z}^{(1)}, \mathbf{Z}^{(2)}).$$


# Using the Covering Lemma to Prove Lemma 3

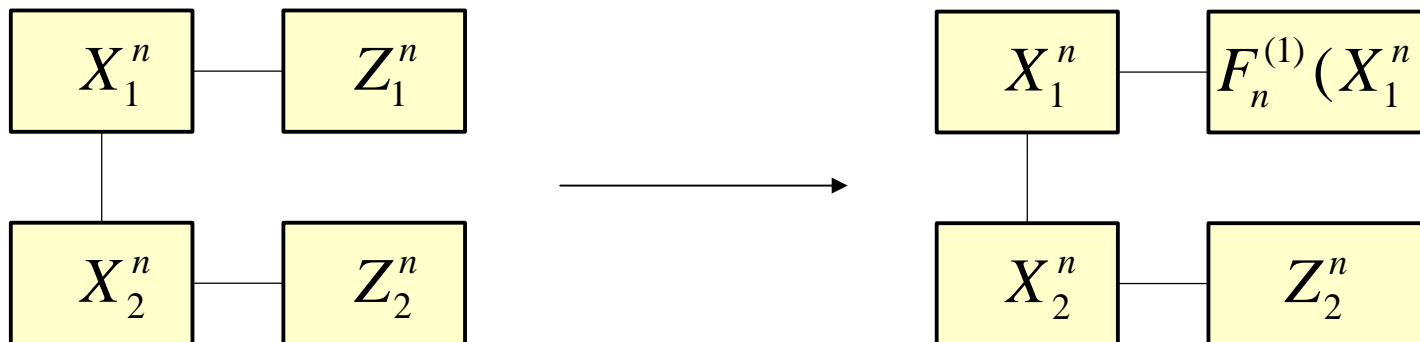

$$U_n = (X_1^n, X_2^n, Z_2^n)$$

$$V_n = X_1^n$$

$$W_n = Z_1^n$$

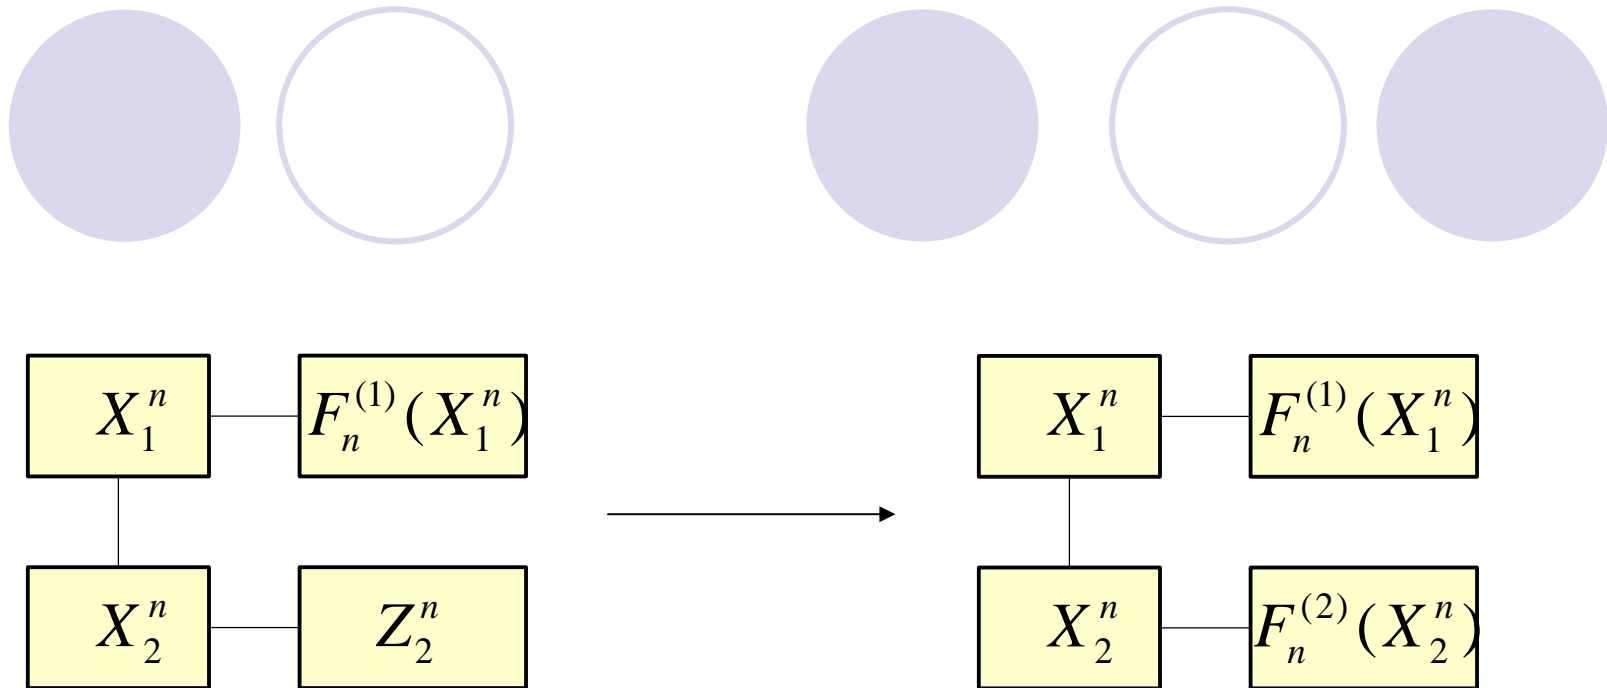


$$U_n = (X_1^n, F_n^{(1)}(X_1^n), X_2^n)$$

$$V_n = X_2^n$$

$$W_n = Z_2^n$$

# Reference

1. T. Berger, “Multiterminal source coding,” in The Information Theory Approach to Communications. New York: Springer-Verlag, July 1977, pp. 171–231.
2. T. Berger and R. W. Yeung. Multiterminal Source Encoding with One Distortion Criterion. IEEE Trans. Inform. Theory, 35(2):228–236, 1989.
3. T. M. Cover, “A proof of the data compression theorem of Slepian and Wolf for ergodic sources,” IEEE Trans. Inform. Theory, vol. 21, no. 2, pp. 226–228, Mar. 1975.
4. M. Gastpar, “The Wyner-Ziv problem with multiple sources,” IEEE Trans. Inform. Theory, vol. 50, no. 11, pp. 2762–2768, Nov. 2004.
5. T. S. Han, Information-Spectrum Methods in Information Theory. Berlin: Springer, 2003.

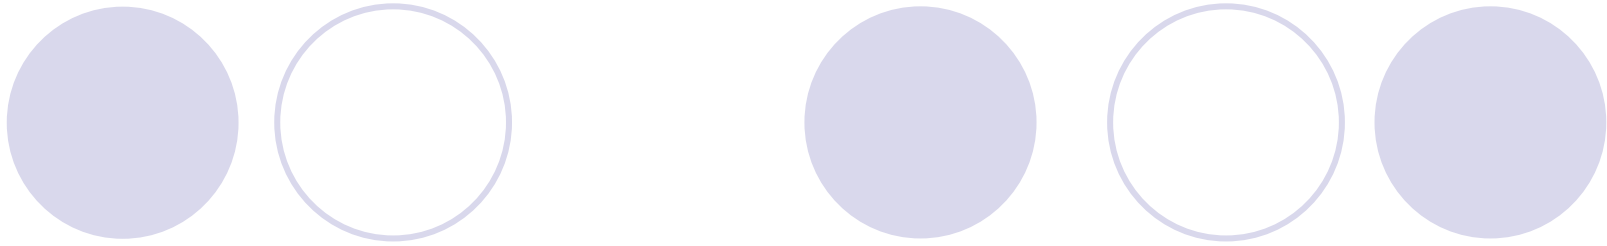

6. K. Iwata and J. Muramatsu, "An information-spectrum approach to rate-distortion function with side information," IEICE Trans. Fundamentals, vol. E85-A, no. 6, pp. 1387–1395, June 2002.
7. S. Miyake and F. Kanaya, "Coding theorems on correlated general sources," IEICE Trans. Fundamentals, vol. E78-A, no. 9, pp. 1063-1070, Sept. 1995.
8. D. Slepian and J. K. Wolf, "Noiseless coding of correlated information sources," IEEE Trans. Inform. Theory, vol. 19, no. 4, pp. 471-480, July 1973.
9. A. D. Wyner, "On source coding at the with side information decoder", IEEE Trans. Inform. Theory, Vol. 21, No. 3, pp. 294-300, May 1975.
10. A. D. Wyner and J. Ziv, "The rate-distortion function for source coding with side information at the decoder," IEEE Trans. Inform. Theory, vol. 22, no. 1, pp. 1–10, Jan. 1976.





Thank you!